

BTS5032 SERIES CLIPPED SINE ULTRA STABLE VC/TCXO - 5.0 x 3.2 x 1.65mm

Frequency Range	10.000MHz to 40.000MHz	
Frequency Stability	±2.0 ppm max (Check with Factory for Tighter Tolerance Requests)	
	±0.5 ppm max (See Chart Below)	
	±0.2 ppm max	
	±0.2 ppm max	
	±1.0 ppm max	
Supply Voltage ± 5%	3.3V	5.0V
Output	Clipped Sine	
Output Load	10kΩ // 10pF	
Output Level	0.8V p-p min	
Current Consumption	2.5mA max	
Temperature Range	See Chart Below	
	-55 °C to +125°C	
Control Voltage	1.5V ± 1.0V	1.5V ± 1.0V
Tuning Range	±5.0 ppm min	
Phase Noise @ 12.8MHz	100Hz offset	-125dBc/Hz
	1kHz offset	-145dBc/Hz
	10kHz offset	-150dBc/Hz
Tristate (Optional)	Disable	0.3 Vdd max
	Enable	0.7 Vdd min

FREQUENCY STABILITY vs. TEMPERATURE (■ - available) (▲ – conditional) (x – not available)

Temp °C / ppm	±0.14	±0.28	±0.37	±0.5
0 ~ +55	■	■	■	■
-10 ~ +60	■	■	■	■
-20 ~ +70	■	■	■	■
-30 ~ +85	■	■	■	■
-40 ~ +85	x	■	■	■





PART NUMBERING GUIDE

Series	Pin 1	Voltage	Stability vs. Temperature	Temp Range	Frequency
BTS5032	Voltage Control = V N/C = Blank	3.3V = 33 5.0V = 50	±0.5 = F ±0.37 = G ±0.28 = H ±0.14 = K	0 ~ +55 °C = 05 -10 ~ +60 °C = 10 -20 ~ +70 °C = 20 -30 ~ +85 °C = 35 -40 ~ +85 °C = 45	20M000

Example P/N: BTS5032 – V – 33 – H – 35 – 20M000

To Request a Quote click here - www.beckelec.com/request-a-quote/

MECHANICAL DRAWING

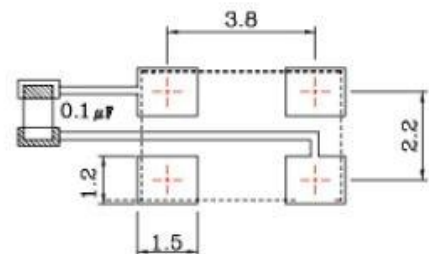

Pin#	Function
1	VCON:VC-TCXO NC:TCXO +OPTION:Tri-State
2	GND
3	OUTPUT
4	VDD

6718 N. 59th Avenue, Glendale, AZ 85301 ▪ Phone: 623-435-6555

Website: www.beckelec.com ▪ Email: sales@beckelec.com